

COREtec[®]

the Original

Where style meets strength.

PRO CORE[®] SERIES OVERVIEW



0.55 mm
HIGH
PERFORMANCE
WEARLAYERS

IN STYLE
indistinguishable
from the real thing

COMFORT
warm & quiet
underfoot

ULTRA STABLE
outstanding
dimensional
stability

BALANCE
extra stability

SUSTAINABLE
attached cork
underlayment

Where style
meets strength.

The unique COREtec® technology, for commercial project flooring.




COREtec[®]

the Original

PRO CORE[®]

The original 100% waterproof floor,
with dent & impact resistance.

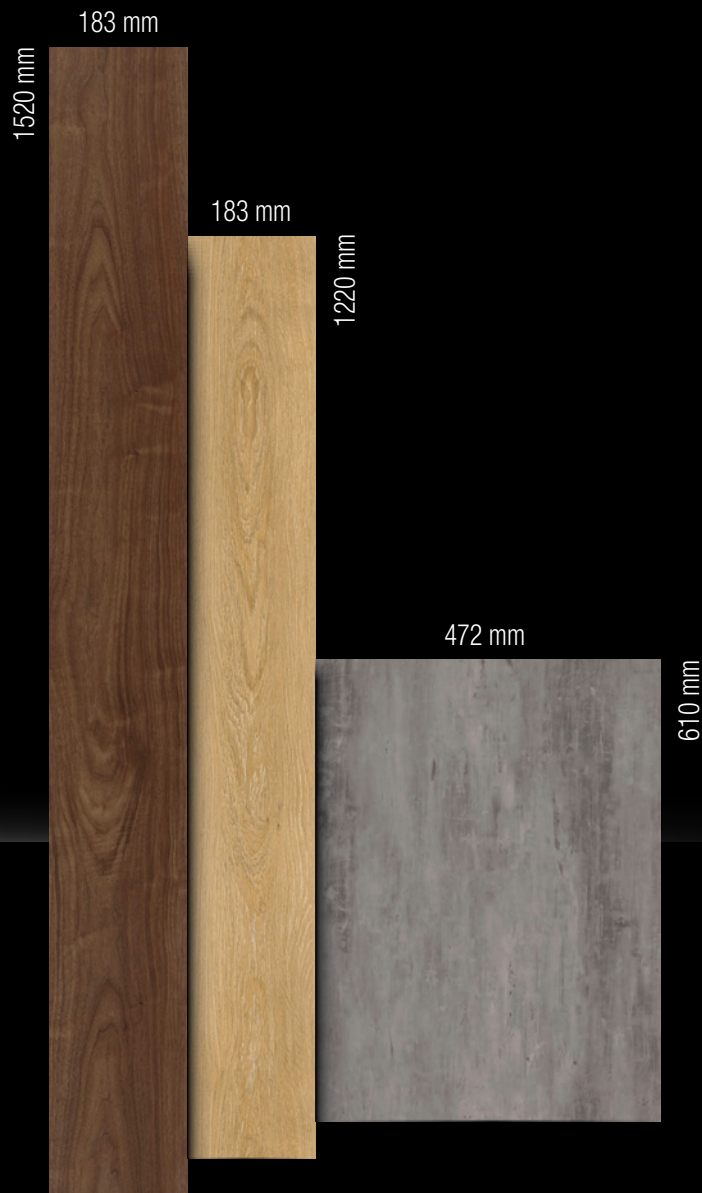

4 V-GROOVE

PRO PLUS
COREtec PRO SERIES



COREtec®
the Original

4-V-GROOVE



1520 x 183 mm



5.00 mm



0.55 mm



12 pcs = 3.34 m² /box · 167 m²/pallet



OPERA

50 RLV 1211
4-V-GROOVE



PIANO

50 RLV 1213
4-V-GROOVE




HARPA

50 RLV 1212
4-V-GROOVE



PEROT

50 RLV 1214
4-V-GROOVE

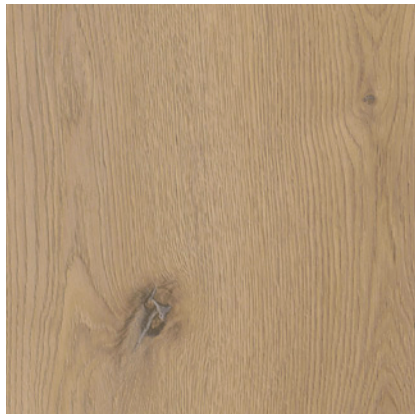

PARRISH

50 RLV 1215
4-V-GROOVE



METROPOL

50 RLV 1216
4-V-GROOVE




ABSOLUTE

50 RLV 1217
4-V-GROOVE



MIRAGE

50 RLV 1218
4-V-GROOVE

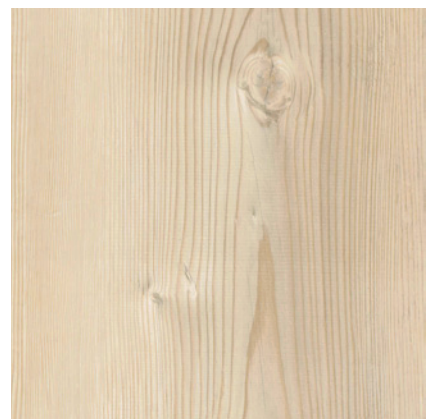

COSMOPOLITAN

50 RLV 1221
4-V-GROOVE



100% waterproof

résistant à l'eau / Wasserfest
Watervast / resistente al agua
resistente all'acqua



Will not expand or contract

Extrêmement stable / Extrem stabil
Extreem stabiel / No se expande ni se contrae
Non dilata o restringe



Pet proof

Adapté aux animaux domestiques
Geeignet für Haustiere


PRO PLUS

COREtec[®] PRO SERIES



DREW

50 RLV 1222
4√-GROOVE

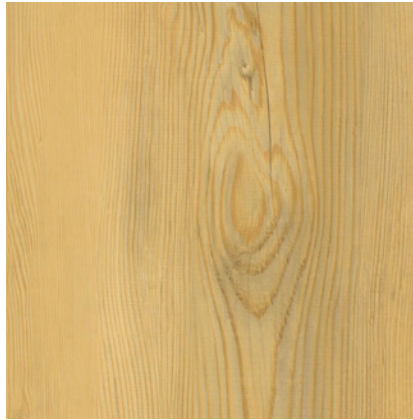


PETRONAS

50 RLV 1223
4√-GROOVE



MILLAU

50 RLV 1224
4√-GROOVE

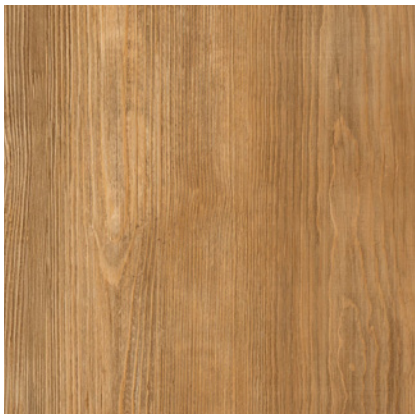

ONTARIO

50 RLV 1226
4√-GROOVE



DOME

50 RLV 1225
4√-GROOVE



WILLIS

50 RLV 1227
4√-GROOVE



KINGDOM

50 RLV 1228
4√-GROOVE



UNION

50 RLV 1229
4√-GROOVE



ARIA

50 RLV 1230
4√-GROOVE



Reduces noise

Silencieux / Schalldämmend
Akoestisch dempend / Reduce el ruido
Riduce il rumore




Electrostatic performance

Accumulation de charges électrostatiques
Antistatisch / Electrostatiche propensiteit
Rendimiento electroestático / Performance elettrostatica



Easy to install

Pose facile / Einfache Verlegung
Plaatst eenvoudig / Fácil de instalar
Facile da installare



COREtec®
the Original



1220 x 183 mm



5.00 mm



0.55 mm



12 pcs = 2.68 m²/box · 134 m²/pallet



BELLAGIO

50 RLV 1220



CANDLER

50 RLV 1209



CENTURY

50 RLV 1204




LUXOR

50 RLV 1219



CHERKIN

50 RLV 1206

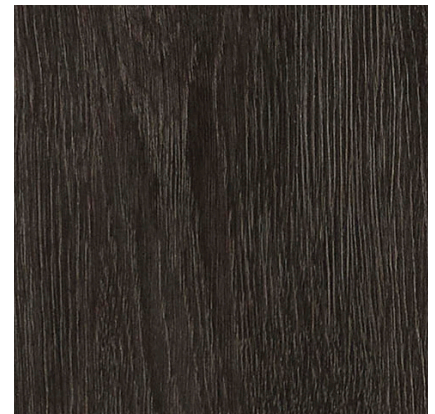


TORSO

50 RLV 1210



STARDUST

50 RLV 1205

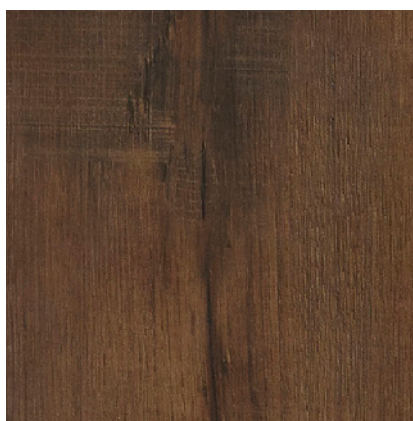

PROMENADE

50 RLV 1208



IMPERIAL

50 RLV 1207



Superior scratch resistance

Résistant aux rayures / Hohe Kratzfestigkeit
Hoge krasweerstand / Alta resistencia a la abrasión
Elevata resistenza ai graffi




Installation on any surface

Compatible toutes surfaces / Sofort auf bestehende Hartböden
Op elke ondergrond / Instalación en cualquier superficie
Può essere installato su ogni superficie esistente

PRO PLUS

COREtec[®] PRO SERIES



610
x 472 mm

5.00 mm

0.55 mm

10 pcs = 2.88 m² /box
138.24 m²/pallet



ORIENTAL

50 RLV 1202



MILLENNIUM

50 RLV 1703



CRISTAL

50 RLV 1701



KRONOS

50 RLV 1203




BEAUFORT

50 RLV 1704



STRATOSPHERE

50 RLV 1702

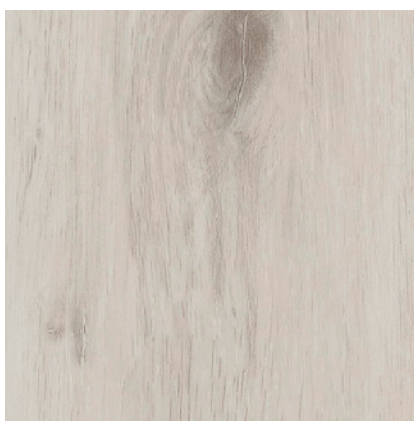

COMCAST

50 RLV 1201



No acclimatization necessary

Pas besoin d'acclimatation / Keine Akklimatisierung benötigt
Geen acclimatisatie nodig / No necesita aclimatación
Non necessita di acclimatazione



Ideal for underfloor heating & cooling

Compatible sur sol chauffant & refroidissant /
Geeignet für Bodenheizung & Kühlung / Ideaal voor vloerverwarming & koeling
Adecuado para calefacción por suelo radiante y refrigeración
Adatto a riscaldamento a pavimento e raffreddamento




Accessories

Accessoires / Zubehör / Accesorios / Accessori / Acessórios


Paintable skirtings

Our paintable skirtings are 100% waterproof & shock resistant.

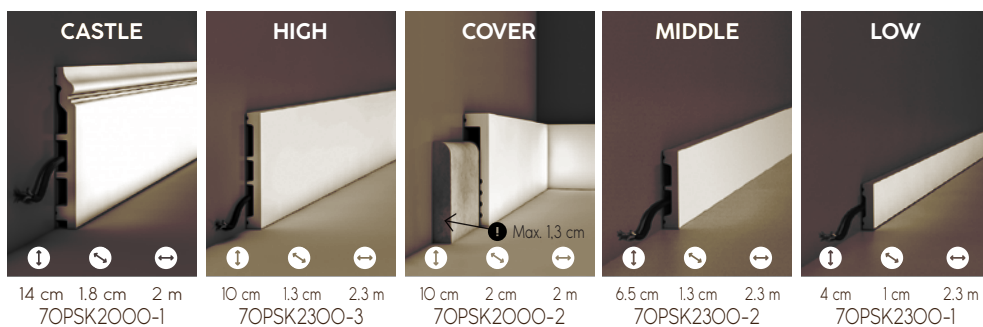

Matching design accessories

Identical Colors and Pattern
Couleurs et décors identiques
Gleiche Farbe und Design
Identieke kleur en design
Colores y patrones idénticos
Identici colori e finiture

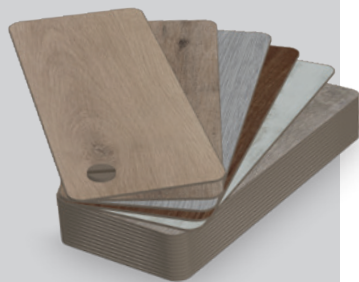

4 V-GROOVE



Easy click & lock



PRO CORE Technical specifications

Technische specificaties / Technische daten / Caractéristiques techniques
Especificaciones técnicas / Specifiche tecniche / Especificações técnicas

LEVEL OF USE

Gebriuksklasse / Classe d'usage / Nutzungs-
klasse / Clasificación de uso / Classe d'uso
Classe de utilização

33-42 (EN ISO 10874)

INFLAMMABILITY

Brandklasse / Classement feu / Brandverhalten
Resistencia al fuego / Classe di resistenza
al fuoco / Classificação de Fogo

B_{fl}-S1 (EN 13501)

SCRATCH RESISTANCE

Krasvastheid / Résistance aux rayures
Verschleissverhalten / Resistencia a la
abrasión / Resistenza ai graffi
Resistencia a riscos

Class T (EN 660-2)

SQUARENESS AND STRAIGHTNESS

Rechtheid en rechthoekigheid / Rectitude des
arrêtes et de l'équerrage / Massstabilität
Cuadratura y rectitud / Dilatazione
Retidão de parada

< 0.15 mm (EN 24342)

CURLING WHEN EXPOSED TO HEAT

Krulling onder invloed van warmte /
Incurvation après exposition à la chaleur
Schüsselung bei Hitzeeinwirkung
Encorvamiento después de exposición al calor
Incurvamento massimo
Incurvation depois de exposição o calor

< 0.02 mm (EN 23999)

DIMENSIONAL STABILITY

Dimensionele stabiliteit / Stabilité dimension-
nelle / Dimensionsstabilität / Estabilidad
dimensional / Stabilità dimensionale
Estabilidade dimensional

< 0.02 mm (EN 23999)

ELECTROSTATIC PERFORMANCE

Electrostatische propensiteit
Accumulation de charges électrostatiques
Antistatik / Rendimiento electroestático
Performance elettrostatica
Acumulação de cargas electrostáticas

< 2 kV (EN 1815)

SLIP RESISTANCE

Antislip / Glissance / Rutschfestigkeit
Coeficiente de fricción / Coefficiente
dinamico di attrito / Anti-derrapagem

DS (EN 13893)

SLIP RESTRAINT

Slipweerstand / Résistance au glissement
Rutschhemmung / Restricción al
resbalamiento / Coefficiente di scivolosità
Resistência o escorrimento

R10 (DIN 51130)

FORMALDEHYDE GROUP

Formaldehydeklasse / Classe formaldehyde
Formaldehyd Klassifizierung / Grupo
formaldehído / Classe Formaldeide
Classificação do formaldeido

E1 (EN 717-1)

ACOUSTIC INSULATION

Kontaktgeluidisolatie / Efficacité
Acoustique / Trittschallverbesserungsmaß
Aislamiento acústico / Isolamento acustico
Eficiência acústica

$\Delta L_w = 17$ dB (ISO 717-2)

DRUM NOISE

Drumgeluid / Bruit réfléchi à la marche
Raumschall / Propagación acústica
Rumore da calpestio
Barulho refletiu o andar

Class SL50 (EPLF)

CASTOR CHAIR RESISTANCE

Bestand tegen stoelwielen / Résistance
aux chaises à roulettes / Stuhlrollenbean-
spruchung / Resistencia a sillas con ruedas
Prova con sedia a ruote / Resistência as
cadeiras de rodas

Pass (EN425)

LIGHT FASTNESS

Lichtechtheid / Résistance à la lumière
Lichtechtheit / Solidez del color a luz
artificial / Resistenza alla luce
Resistência a luz

8 (ISO 105-B02)

HEAT INSULATION

Thermische isolatie / Isolation thermique
Wärmedurchlasswiderstand / Aislamiento térmico
Isolamento al calore / Isolamento térmico

0.027 (m² K/W) (EN 12667 ISO 8302)

UNDERFLOOR HEATING

Vloerverwarming / Chauffage par le sol
Bodenheizung / Calefacción por suelo radiante
Riscaldamento a pavimento / Compatível com
aquecimento do pavimento

Suitable / Geschikt / Adéquat

Geeignet / Adecuado / Adatto

Adequado

RESISTANCE TO CHEMICALS

Chemicaliënresistentie / Résistance aux
produits chimiques / Chemikalienbeständigkeit
Resistencia a los productos químicos
Resistenza ai prodotti chimici / Resistência em
substâncias químicas

Very good / Zeer goed / Très bonne

Sehr gut / Muy bueno / Molto buono

Muito bom (EN 423)

RESIDUAL INDENTATION CERTIFIED

Restindruk gecertificeerd / Poinçonement
rémanent certifié / Eindrückverhalten
zertifiziert / Huella residual
Indentazione residua certificata
Perfuração remanescente certificada

0.09 mm (EN ISO 24343-1:2012)



LIFETIME
WARRANTY
RESIDENTIAL



10 YEAR
WARRANTY
COMMERCIAL



The warranty covers manufacturing defects and premature wear in the event of normal use. / La garantie couvre les vices de fabrication et l'usure précoce en usage normal. / Die Garantie deckt Herstellungsfehler und vorzeitigem Verschleiß bei normaler Nutzung. / De garantie dekt fabricagefouten en voortijdig afslijten bij normaal gebruik. / La garantía cubre los defectos de fabricación y el desgaste prematuro en caso de uso normal. / La garanzia copre i difetti di produzione e usura prematura in caso di corretto e normale utilizzo. / Záruka sa vzťahuje na výrobné chyby a predčasné opotrebenie v prípade bežného používania. / Garantijn gällar tillverkningsfel och för tidig utslitning vid normalt användande. / Takuu kattaa valmistusvirheit ja normaalista käytöstä johtuvan pinnan puhkikuluminen. / Gwarancja obejmuje wady fabryczne i przedwczesne zużycie w przypadku normalnego użytkowania. / Гарантия покрывает производственные дефекты и преждевременный износ при нормальном использовании

US FLOORS

Manufacturer of Unique and Sustainable Floors

A DIVISION OF

Shaw

coretecfloors.com