


## 2,9mm ring stripnail, bright basic, Sencoted



### Applications

Framing, sheathing, subfloor, decks, trusses and pallets

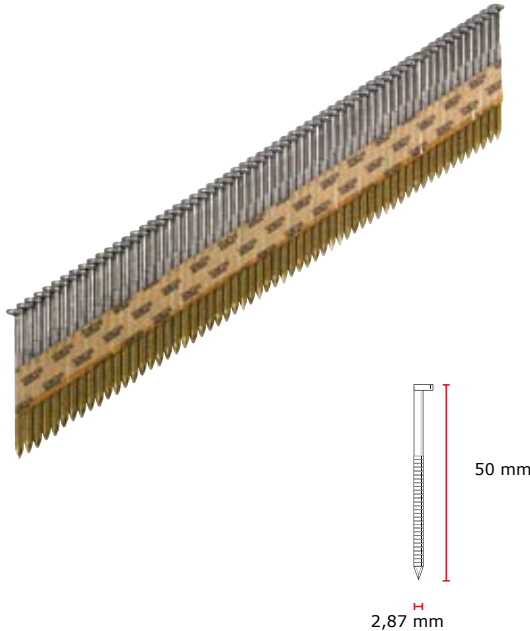

### Technical specifications

Length	50 mm
Fastener head type 1	Clipped head
Pointangle (nominal)	40°
Point type	Diamond
Max. strip length	199,11 mm
Amount fasteners on strip/coil	29-31 pieces
Collation type 1	Paper collated
Collation angle	34°
Wire material	Bright basic standard tensile
Finish	Sencoted

### Advanced technical specifications

Number declaration of performance	VS-CPR-201305-S027
Characteristic yield moment	2525 Nmm
Characteristic withdrawal parameter paralel	7,8 N/mm <sup>2</sup>
Characterist head pull through parameter	20,3 N/mm <sup>2</sup>
Characteristic tensile strenght	695 N/mm <sup>2</sup>
Coating lenght	28 mm
Head cross sectional area	30 mm
Lenght of threaded part	30 mm
Lenght of point	3,7 mm
Coating type	Coating type 3
CE fastener type	Round cross-section ring shank nail
Service class	1

**2,9mm ring stripnail, bright basic, Sencoted****Logistic specifications****Primary packaging**

Primary packaging	Box
Quantity in primary packaging	2000
GTIN (Base unit of measure)	8715274028583